

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
8 July 2004 (08.07.2004)

PCT

(10) International Publication Number  
**WO 2004/057080 A1**

(51) International Patent Classification<sup>7</sup>: **D03D 47/30**

(21) International Application Number:  
PCT/BE2003/000221

(22) International Filing Date:  
16 December 2003 (16.12.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
2002/0740 19 December 2002 (19.12.2002) BE

(71) Applicant (for all designated States except US): **PI-CANOL N.V. naamloze vennootschap** [BE/BE]; Ter Waarde 50, B-8900 Ieper (BE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **PEETERS, Jozef**

[BE/BE]; Bukkersstraat 32, B-8900 Ieper (BE). **HIEM-STR**, Hendrik [NL/NL]; Wolfsklauw 14, NL-Deurne (NL).


(74) Agent: **DONNÉ, E.**; Bureau M.F.J. Bockstael nv., Arenbergstraat 13, B-2000 Antwerpen (BE).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE,

[Continued on next page]

(54) Title: **BLOWING NOZZLE FOR SUPPORTING A WEFT THREAD IN A WEAVING MACHINE**

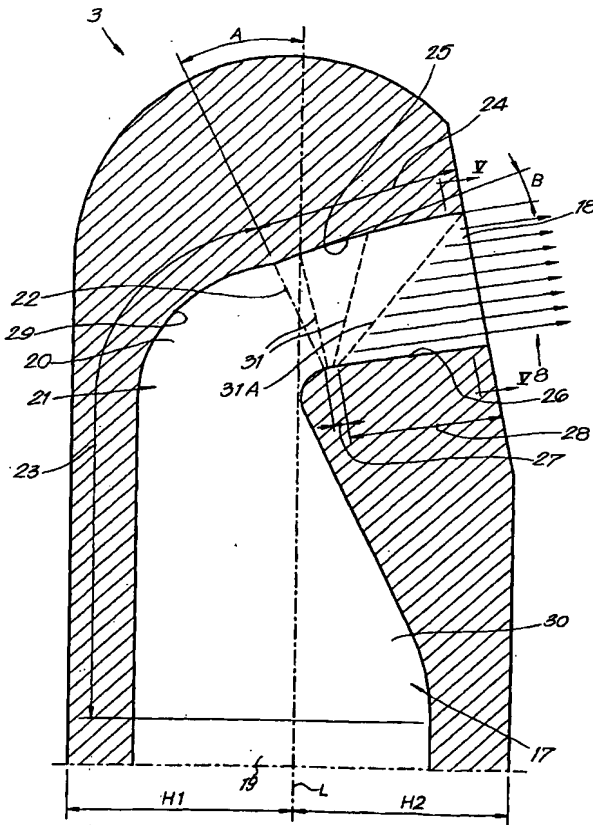

(57) Abstract: Blowing nozzle for supporting a weft thread in a weaving machine, provided with a flow-through canalisation (17) for a fluid tracing a bend (20) near the free end of the blowing nozzle (3) to subsequently flow into the environment via at least one outlet opening (18), whereby a jet pipe (21) is formed in this flow-through canalisation (17), characterised in that the above-mentioned jet pipe (21) is integrated in the above-mentioned bend (20).

WO 2004/057080 A1